


SureVoice Panel7

Technical data sheet

DESCRIPTION:

The SureVoice Panel7 is a versatile controller working position (CWP) for the SureVoice VCS. The SureVoice Panel7 is highly reliable and offers a complete setup due to its integrated audio options. It features two 1000 Base-T Gigabit Ethernet connections with Power over Ethernet to maintain a redundant connection to the network.

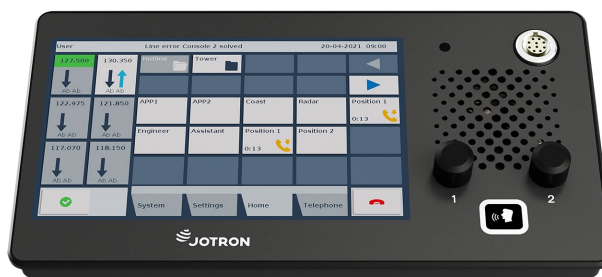

PARAMETER	SPECIFICATION
Connections	2x 1000 Base-T Gigabit Ethernet 2x Power over Ethernet (IEEE 802.3bt / PoE++) 1x Customer specific auxiliary port 1x Optional USB type-C port (USB 3.1 gen 1)
Power	Power usage 30 W (Max.) 2x 15 – 50 VDC input (not required when PoE is used)
Dimensions	25 (W) x 13,5 (H) x 9 cm (D)
Mounting options	VESA 100 Free Table Stand In desk In 19" subrack (3U)
Interoperability	ED-137
Audio	2x Digital connector for external audio Integrated speaker Integrated PTT button Integrated LEMO socket or gooseneck microphone
Display	7" Display with capacitive touch Resolution 800 x 480 Brightness 1000 cd/m ² Viewing angle 85°
Applications	VCS system in ATC VCS system in Maritime
Operating environment	Operating temperature: 0 to 50 °C Humidity: 5 – 95% non-condensing
Regulations	EMC: EN 55032, EN 55035 Safety: EN 62368-1