


SureVoice Solid VCS

Technical data sheet

DESCRIPTION:

The SureVoice Solid VCS is the heart of the Voice Communication System. The SureVoice Solid VCS features four 1000 Base-T Gigabit Ethernet ports to provide redundant connectivity to two separate networks. The SureVoice Solid supports radios, telephony and CWP connections.

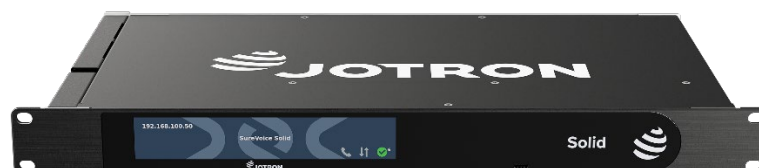

PARAMETER	SPECIFICATION
Connections	4x 1000 Base-T Gigabit Ethernet 3x dry contact outputs 1x dry contact input 1x Optional USB type-C port (USB 3.1 gen 1)
Power	Power usage 25 W (Max.) Redundant power supply options available with either: 230 VAC input power supply 15 – 60 VDC input power supply
Dimensions	1U (H) x 19" (W) x 20 cm (D)
Interoperability	ED-137
Display	6.6" Display with capacitive touch Brightness 800 cd/m ² Viewing angle 80°
Applications	VCS system in ATC VCS system in Maritime
Operating environment	Operating temperature: -20 to 55 °C Humidity: 5 – 95% non-condensing
Regulations	EMC: EN 55032, EN 55035 Safety: EN 62368-1